
ZSS OW
Bleeding hose

Properties

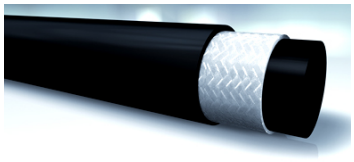

Application	Bleeding hose
Special features	antistatic inner and outer rubber
Standard	EN 1360
Inner layer	NBR
Insert	one braided textile insert
Outer layer	NBR
Colour	black
Temp. min.	-25 °C
Temp. max.	55 °C
Media	All types of mineral oil products with a max. aromatic content of 60%

Item

Identification	Internal Ø (mm)	External Ø (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)	Roll length (m)
ZSS OW 20	19,0	31	16,0	48	95	40
ZSS OW 25	25,4	38	16,0	48	152	40

Accessories

TWA AR	Screw fitting for hose ZSSOW

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.