
SST
Shrink hose

Properties

Properties	Flame retardant in accordance with MVSS and UL 224
Colour	black
Temp. min.	-55 °C
Temp. max.	135 °C
Temp. range	Shrinking temperature above 90°C to 200°C
Material	crosslinked modified polyolefin

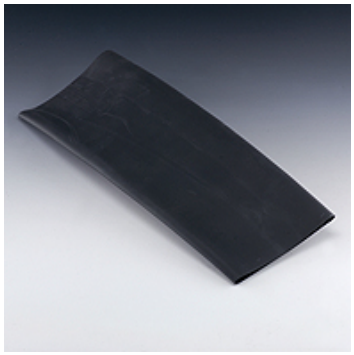

Description

Shrink hose usable in the widest possible range of applications, flame-retardant for additional protection against weather influences (e.g., swage fittings in seawater areas).

Item

Identification	Internal Ø (mm)	Wall thickness (mm)	Min. shrinkage Ø (mm)	Shrinking rate
SST 25	25,4	0,9	12,7	2:1
SST 38	38,0	1,0	19,0	2:1
SST 50	51,0	1,1	25,4	2:1

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.