
SSTK
Shrink hose with adhesive coating

Properties

Properties	flame retardant and not self-extinguishing, complies with DIN VDE 0278
Colour	black
Temp. min.	-55 °C
Temp. max.	110 °C
Temp. range	Min. shrinking temperature of 110 °C
Material	crosslinked modified polyolefin

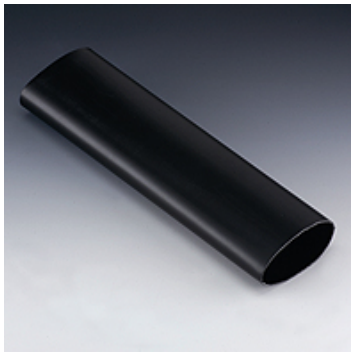

Description
Shrink hose usable in the widest possible range of applications, flame-retardant with interior adhesive coating for better bonding.

Additional information
Provides additional protection against climatic influences (e.g. swage fittings for use near sea water) or used for cable bundling

Item

Identification	Internal Ø (mm)	Wall thickness (mm)	Min. shrinkage Ø (mm)	Shrinking rate
SSTK 2006	20	2	6,0	to 3,5:1
SSTK 3010	30	2	10,0	to 3,5:1
SSTK 4012	40	2	12,0	to 3,5:1
SSTK 5018	54	2	18,0	to 3,5:1

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.