
SKS IN SP KE

Plug-in coupling connector

Properties

Application	General application, e.g. in industry, construction machinery, agricultural technology etc.
Connection 1	NPT internal thread
Sealing form 1	thread seal
compatible with	Pioneer
Additional feature	with plug valve
Material	Steel
Surface	electro galvanised

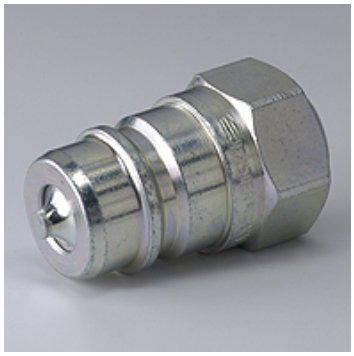

Description

Plug-in couplings allow quick coupling.

Item

Identification	DN*	Connecting thread	Operating pressure (bar)	SF coup.*	Mineral oil temp. min. (°C)	Mineral oil temp. max. (°C)
SKS 06 IN SP KE	6	NPT 1/4" -18	350,0	4	-25	125
SKS 10 IN SP KE	10	NPT 3/8" -18	300,0	4	-25	125
SKS 13 IN SP KE	12	NPT 1/2" -14	300,0	4	-25	125
SKS 25 IN SP KE	25	NPT 1" -11,5	230,0	4	-25	125

DN = Nominal diameter, nominal width – SF gek. = Safety factor coupled

Accessories

SKS ZUBS SP	Dust protection coupling connector, SKS..SP

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.