


PA 500 AOS 45 VA

Swage fitting, DKOS angle 45°

HANSA FLEX

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOS
Standard	ISO 8434-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Stainless steel

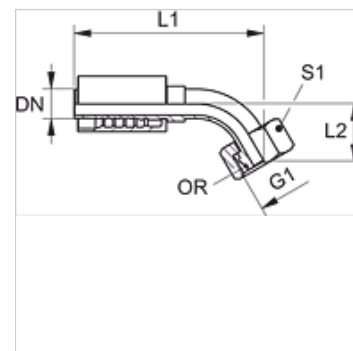

Ordering information

Seals of NBR

FPM (Viton) on request

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L2 (mm)	S1	OR
PA 520 AOS 16 45 VA	19	12	3/4"	M 30 x 2	20	45,0	36	17.5 x 2.5
PA 520 AOS 45 VA	19	12	3/4"	-	25	40,0	46	22.0 x 2.5
PA 525 AOS 20 45 VA	25	16	1"	-	25	52,0	46	22.0 x 2.5
PA 525 AOS 45 VA	25	16	1"	-	30	43,0	50	27.0 x 2.5
PA 532 AOS 45 VA	31	20	1.1/4"	-	38	52,0	60	33.0 x 2.5

Product versions

PA 500 AOS 45 A	Swage fitting, DKOS angle 45°, Steel
-----------------	--------------------------------------