
PA 500 SF VA

Swage fitting, SFL

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	SAE flange connection 3000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFL
Standard	SAE J518 ISO 6162-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Stainless steel



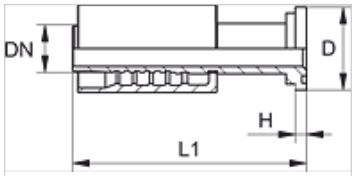

Ordering information

Seals of NBR

FPM (Viton) on request

Item

Identification	DN	Size	Inches	Flange size	D (mm)	H (mm)
PA 520 SF VA	19	12	3/4"	3/4"	38,1	6,7
PA 520 SF 25 VA	19	12	3/4"	1"	44,5	8,0
PA 525 SF VA	25	16	1"	1"	44,5	8,0
PA 525 SF 32 VA	25	16	1"	1.1/4"	50,8	8,0
PA 532 SF VA	31	20	1.1/4"	1.1/4"	50,8	8,0
PA 532 SF 40 VA	31	20	1.1/4"	1.1/2"	60,3	8,0
PA 540 SF VA	38	24	1.1/2"	1.1/2"	60,3	8,0
PA 540 SF 50 VA	38	24	1.1/2"	2"	60,3	8,0
PA 550 SF VA	51	32	2"	2"	71,4	9,5

Product versions

PA 500 SF A	Swage fitting, SFL, Steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.