# PA 500 SF6 45 VA


Swage fitting, SFS angle 45°

HANSA-FLEX

## Properties

| | |
|---|---|
| **Application** | Swage fitting for HD 500 hoses |
| **Connection 1** | SAE flange connection 6000 PSI |
| **Sealing form 1** | flat seal with SF O-ring |
| **Short code** | SFS |
| **Standard** | SAE J518<br>ISO 6162-2 |
| **Integration** | with pull-out protection (interlock) |
| **Scope of supply** | Swage nipple + swage ferrule |
| **Material** | Stainless steel |



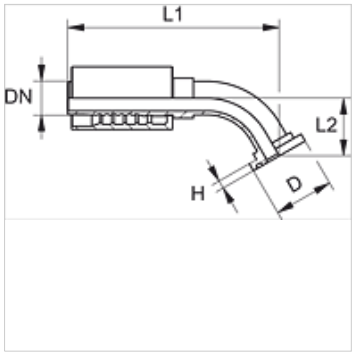


## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L2 (mm) |
|---|---|---|---|---|---|---|---|
| **PA 520 SF6 45 VA** | 19 | 12 | 3/4" | 3/4" | 41,3 | 8,8 | 38,0 |
| **PA 520 SF6 25 45 VA** | 19 | 12 | 3/4" | 1" | 47,6 | 9,5 | 40,0 |
| **PA 525 SF6 45 VA** | 25 | 16 | 1" | 1" | 47,6 | 9,5 | 40,0 |
| **PA 525 SF6 32 45 VA** | 25 | 16 | 1" | 1.1/4" | 54,0 | 10,3 | 44,0 |
| **PA 532 SF6 45 VA** | 31 | 20 | 1.1/4" | 1.1/4" | 54,0 | 10,3 | 46,0 |
| **PA 532 SF6 40 45 VA** | 31 | 20 | 1.1/4" | 1.1/2" | 63,5 | 12,6 | 48,0 |
| **PA 540 SF6 45 VA** | 38 | 24 | 1.1/2" | 1.1/2" | 63,5 | 12,6 | 48,0 |
| **PA 540 SF6 50 45 VA** | 38 | 24 | 1.1/2" | 2" | 79,4 | 12,6 | 65,0 |
| **PA 550 SF6 45 VA** | 51 | 32 | 2" | 2" | 79,4 | 12,6 | 65,0 |

## Product versions

| | |
|---|---|
| **PA 500 SF6 45 A** | Swage fitting, SFS angle 45°, Steel |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*