


# PA 500 SF6 45 VA

Swage fitting, SFS angle 45°

**HANSA FLEX**

## Properties

|                        |                                      |
|------------------------|--------------------------------------|
| <b>Application</b>     | Swage fitting for HD 500 hoses       |
| <b>Connection 1</b>    | SAE flange connection 6000 PSI       |
| <b>Sealing form 1</b>  | flat seal with SF O-ring             |
| <b>Short code</b>      | SFS                                  |
| <b>Standard</b>        | SAE J518<br>ISO 6162-2               |
| <b>Integration</b>     | with pull-out protection (interlock) |
| <b>Scope of supply</b> | Swage nipple + swage ferrule         |
| <b>Material</b>        | Stainless steel                      |

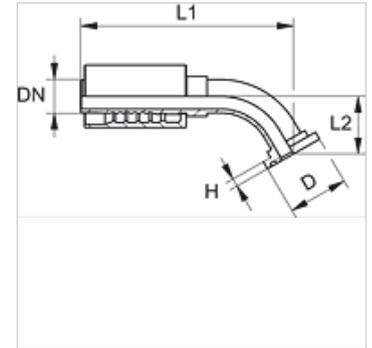

## Ordering information

Seals of NBR  
FPM (Viton) on request

## Item

| Identification      | DN | Size | Inches | Flange size | D<br>(mm) | H<br>(mm) | L2<br>(mm) |
|---------------------|----|------|--------|-------------|-----------|-----------|------------|
| PA 520 SF6 45 VA    | 19 | 12   | 3/4"   | 3/4"        | 41,3      | 8,8       | 38,0       |
| PA 520 SF6 25 45 VA | 19 | 12   | 3/4"   | 1"          | 47,6      | 9,5       | 40,0       |
| PA 525 SF6 45 VA    | 25 | 16   | 1"     | 1"          | 47,6      | 9,5       | 40,0       |
| PA 525 SF6 32 45 VA | 25 | 16   | 1"     | 1.1/4"      | 54,0      | 10,3      | 44,0       |
| PA 532 SF6 45 VA    | 31 | 20   | 1.1/4" | 1.1/4"      | 54,0      | 10,3      | 46,0       |
| PA 532 SF6 40 45 VA | 31 | 20   | 1.1/4" | 1.1/2"      | 63,5      | 12,6      | 48,0       |
| PA 540 SF6 45 VA    | 38 | 24   | 1.1/2" | 1.1/2"      | 63,5      | 12,6      | 48,0       |
| PA 540 SF6 50 45 VA | 38 | 24   | 1.1/2" | 2"          | 79,4      | 12,6      | 65,0       |
| PA 550 SF6 45 VA    | 51 | 32   | 2"     | 2"          | 79,4      | 12,6      | 65,0       |

## Product versions

PA 500 SF6 45 A Swage fitting, SFS angle 45°, Steel