


ND AB 90

Plug-in nipple, DKR angle 90°

HANSA FLEX

Properties

| | |
|----------------|-----------------------|
| Connection 1 | BSP nut thread |
| Sealing form 1 | 60° outer cone |
| Short code | DKR |
| Standard | ISO 8434-6 BS 5200 |
| Material | Steel |
| Surface | electro galvanised |

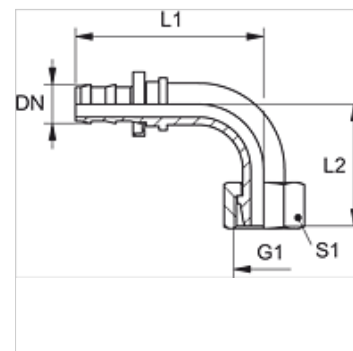

Note

Undamaged nipples can be reused.

Item

| Identification | DN | Size | Inches | G1 | L1 (mm) | L2 (mm) | S1 |
|----------------|----|------|--------|------------|------------|------------|----|
| ND 06 AB 90 | 6 | 4 | 1/4" | G 1/4" -19 | 42,0 | 29,0 | 17 |
| ND 10 AB 90 | 10 | 6 | 3/8" | G 3/8" -19 | 49,0 | 33,0 | 19 |
| ND 13 AB 90 | 12 | 8 | 1/2" | G 1/2" -14 | 60,0 | 39,0 | 27 |
| ND 16 AB 90 | 16 | 10 | 5/8" | G 5/8" -14 | 74,0 | 43,0 | 30 |
| ND 20 AB 90 | 19 | 12 | 3/4" | G 3/4" -14 | 88,0 | 53,0 | 32 |

Accessories

| | |
|-------------------|------------------------------|
| ND ASR GE, RO, BL | Stop ring for plug-in nipple |
|-------------------|------------------------------|