


# ND AOL 90

Plug-in nipple, DKOL angle 90°

**HANSA FLEX**

## Properties

|                       |                            |
|-----------------------|----------------------------|
| <b>Connection 1</b>   | metric nut thread          |
| <b>Sealing form 1</b> | 24° outer cone with O-ring |
| <b>Short code</b>     | DKOL                       |
| <b>Standard</b>       | ISO 8434-1                 |
| <b>Material</b>       | Steel                      |
| <b>Surface</b>        | electro galvanised         |

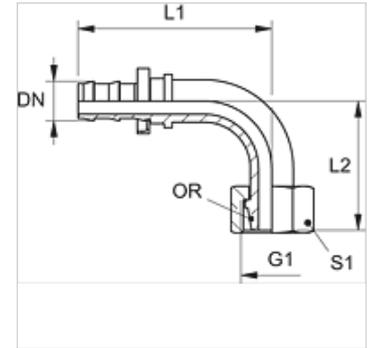

## Note

Undamaged nipples can be reused.

## Item

| Identification  | DN | Size | Inches | G1         | for external pipe Ø<br>(mm) | L1<br>(mm) | L2<br>(mm) | S1 | OR         |
|-----------------|----|------|--------|------------|-----------------------------|------------|------------|----|------------|
| ND 06 AOL 04 90 | 6  | 4    | 1/4"   | M 12 x 1.5 | 6                           | 42,0       | 36,0       | 14 | 4.5 x 1.5  |
| ND 10 AOL 08 90 | 10 | 6    | 3/8"   | M 16 x 1.5 | 10                          | 49,0       | 35,0       | 19 | 8.5 x 1.5  |
| ND 10 AOL 90    | 10 | 6    | 3/8"   | M 18 x 1.5 | 12                          | 49,0       | 36,0       | 22 | 10.5 x 1.5 |
| ND 13 AOL 90    | 12 | 8    | 1/2"   | M 22 x 1.5 | 15                          | 58,0       | 41,0       | 27 | 12.5 x 1.5 |
| ND 16 AOL 90    | 16 | 10   | 5/8"   | M 26 x 1.5 | 18                          | 74,0       | 45,0       | 32 | 16.0 x 2.0 |

## Accessories

ND ASR GE, RO, BL Stop ring for plug-in nipple