


# ND FL / ND FS

Plug-in nipple, BEL / BES

## Properties

<b>Connection 1</b>	Pipe sockets
<b>Sealing form 1</b>	Cutting ring connection
<b>Short code</b>	BEL / BES
<b>Standard</b>	ISO 8434-1
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

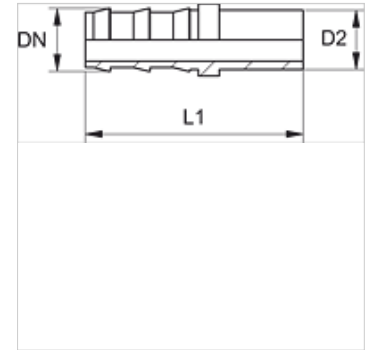

## Note

Undamaged nipples can be reused.  
 Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).  
 Do not use for new designs; for ND...FL we recommend: ND...AOL.

## Item

Identification	DN	Size	Inches	Series	D2 (mm)	L1 (mm)
ND 06 FL 04	6	4	1/4"	L	6,0	44,0
ND 06 FL	6	4	1/4"	L	8,0	44,0
ND 10 FL 08	10	6	3/8"	L	10,0	49,0
ND 10 FL	10	6	3/8"	L	12,0	49,0
ND 13 FL 10	12	8	1/2"	L	12,0	54,0
ND 13 FL	12	8	1/2"	L	15,0	55,0
ND 16 FL	16	10	5/8"	L	18,0	67,0
ND 20 FL	19	12	3/4"	L	22,0	69,0
ND 06 FS	6	4	1/4"	S	10,0	-

## Accessories

ND ASR GE, RO, BL Stop ring for plug-in nipple

## Additional elements

VOM Pre-assembly sockets