
ND FL / ND FS
Plug-in nipple, BEL / BES

HANSA-FLEX

Properties

Connection 1	Pipe sockets
Sealing form 1	Cutting ring connection
Short code	BEL / BES
Standard	ISO 8434-1
Material	Steel
Surface	electro galvanised



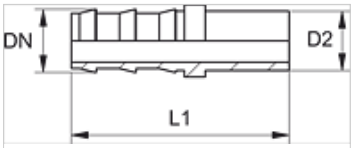

Note

Undamaged nipples can be reused.
Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).
Do not use for new designs; for ND...FL we recommend: ND...AOL.

Item

Identification	DN	Size	Inches	Series	D2 (mm)	L1 (mm)
ND 06 FL 04	6	4	1/4"	L	6,0	44,0
ND 06 FL	6	4	1/4"	L	8,0	44,0
ND 10 FL 08	10	6	3/8"	L	10,0	49,0
ND 10 FL	10	6	3/8"	L	12,0	49,0
ND 13 FL 10	12	8	1/2"	L	12,0	54,0
ND 13 FL	12	8	1/2"	L	15,0	55,0
ND 16 FL	16	10	5/8"	L	18,0	67,0
ND 20 FL	19	12	3/4"	L	22,0	69,0
ND 06 FS	6	4	1/4"	S	10,0	-

Accessories

ND ASR GE, RO, BL	Stop ring for plug-in nipple

Additional elements

VOM	Pre-assembly sockets

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.