

# ND FL / ND FS

Plug-in nipple, BEL / BES

## Properties

**Connection 1** Pipe sockets


**Sealing form 1** Cutting ring connection

**Short code** BEL / BES

**Standard** ISO 8434-1

**Material** Steel

**Surface** electro galvanised

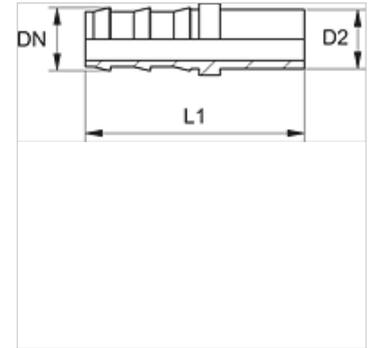

## Note

Undamaged nipples can be reused.

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).

Do not use for new designs; for ND...FL we recommend: ND...AOL.

## Item

| Identification | DN | Size | Inches | Series | D2 (mm) | L1 (mm) |
|----------------|----|------|--------|--------|---------|---------|
| ND 06 FL 04    | 6  | 4    | 1/4"   | L      | 6,0     | 44,0    |
| ND 06 FL       | 6  | 4    | 1/4"   | L      | 8,0     | 44,0    |
| ND 10 FL 08    | 10 | 6    | 3/8"   | L      | 10,0    | 49,0    |
| ND 10 FL       | 10 | 6    | 3/8"   | L      | 12,0    | 49,0    |
| ND 13 FL 10    | 12 | 8    | 1/2"   | L      | 12,0    | 54,0    |
| ND 13 FL       | 12 | 8    | 1/2"   | L      | 15,0    | 55,0    |
| ND 16 FL       | 16 | 10   | 5/8"   | L      | 18,0    | 67,0    |
| ND 20 FL       | 19 | 12   | 3/4"   | L      | 22,0    | 69,0    |
| ND 06 FS       | 6  | 4    | 1/4"   | S      | 10,0    | -       |

## Accessories

ND ASR GE, RO, BL Stop ring for plug-in nipple

## Additional elements

VOM Pre-assembly sockets