

ND HB

Plug-in nipple, AGR

HANSA FLEX

Properties

Connection 1 BSP external thread, cylindrical


Sealing form 1 60° inner cone

Short code AGR

Standard ISO 8434-6
BS 5200

Material Steel

Surface electro galvanised

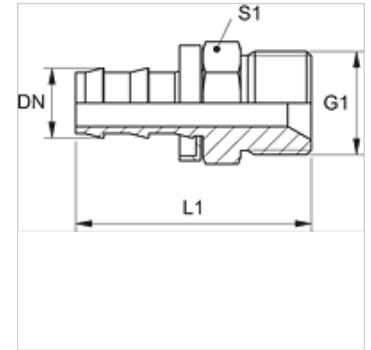

Note

Undamaged nipples can be reused.

Item

| Identification | DN | Size | Inches | G1 | L1 (mm) | S1 |
|----------------|----|------|--------|------------|------------|----|
| ND 06 HB 02 | 6 | 4 | 1/4" | G 1/8" -28 | 36,0 | 17 |
| ND 06 HB | 6 | 4 | 1/4" | G 1/4" -19 | 41,0 | 19 |
| ND 10 HB 06 | 10 | 6 | 3/8" | G 1/4" -19 | 44,0 | 19 |
| ND 10 HB | 10 | 6 | 3/8" | G 3/8" -19 | 45,0 | 22 |
| ND 13 HB | 12 | 8 | 1/2" | G 1/2" -14 | 53,0 | 27 |
| ND 16 HB 13 | 16 | 10 | 5/8" | G 1/2" -14 | - | - |
| ND 16 HB | 16 | 10 | 5/8" | G 5/8" -14 | 65,0 | 30 |
| ND 20 HB | 19 | 12 | 3/4" | G 3/4" -14 | 65,0 | 32 |

Accessories

ND ASR GE, RO, BL Stop ring for plug-in nipple