PA 500 AJ 90 VA


Swage fitting, DKJ angle 90°

HANSA-FLEX

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	UN/UNF nut threads
Sealing form 1	74° inner cone
Short code	DKJ
Standard	ISO 8434-2
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Stainless steel



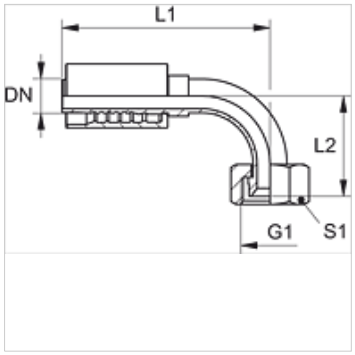

Item

Identification	DN	Size	Inches	G1	L2 (mm)	S1
PA 520 AJ 90 VA	19	12	3/4"	1.1/16" -12 UN	72,0	32
PA 520 AJ 25 90 VA	19	12	3/4"	1.5/16" -12 UN	79,0	41
PA 525 AJ 90 VA	25	16	1"	1.5/16" -12 UN	86,0	41
PA 525 AJ 32 90 VA	25	16	1"	1.5/8" -12 UN	93,0	50
PA 532 AJ 90 VA	31	20	1.1/4"	1.5/8" -12 UN	96,0	50
PA 532 AJ 40 90 VA	31	20	1.1/4"	1.7/8" -12 UN	98,0	60
PA 540 AJ 90 VA	38	24	1.1/2"	1.7/8" -12 UN	107,0	60
PA 540 AJ 50 90 VA	38	24	1.1/2"	2.1/2" -12 UN	-	-
PA 550 AJ 90 VA	51	32	2"	2.1/2" -12 UN	151,5	70

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.