

# PA 500 AJ A H

Swage fitting, DKJ

**HANSA FLEX**

## Properties

**Application** Swage fitting for HD 500 hoses

**Connection 1** UN/UNF nut threads

**Sealing form 1** 74° inner cone

**Short code** DKJ

**Standard** ISO 8434-2


**Integration** with pull-out protection (interlock)

**Scope of supply** Swage nipple + swage ferrule

**Additional feature** for breaker operation

**Material** Steel

**Surface** electro galvanised

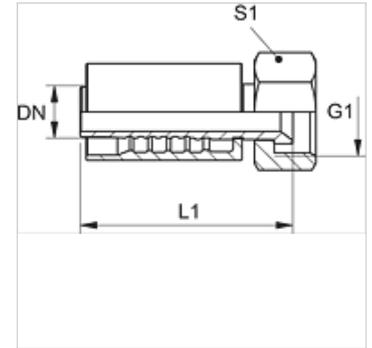

## Description

Reinforced design for extreme loads, e.g. use in hammers.

## Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	S1
PA 720 AJ H	19	12	3/4"	345,0	1.1/16" -12 UN	91,5	32
PA 725 AJ H	25	16	1"	275,0	1.5/16" -12 UN	98,2	41
PA 725 AJ 32 H	25	16	1"	200,0	1.5/8" -12 UN	111,0	50
PA 532 AJ AH	31	20	1.1/4"	200,0	1.5/8" -12 UN	-	-