


# PA 500 AJ A H

Swage fitting, DKJ

**HANSA FLEX**

## Properties

<b>Application</b>	Swage fitting for HD 500 hoses
<b>Connection 1</b>	UN/UNF nut threads
<b>Sealing form 1</b>	74° inner cone
<b>Short code</b>	DKJ
<b>Standard</b>	ISO 8434-2
<b>Integration</b>	with pull-out protection (interlock)
<b>Scope of supply</b>	Swage nipple + swage ferrule
<b>Additional feature</b>	for breaker operation
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

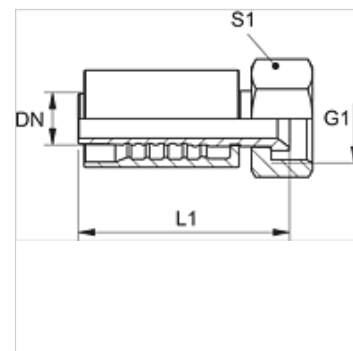

## Description

Reinforced design for extreme loads, e.g. use in hammers.

Item							
Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	S1
PA 720 AJ H	19	12	3/4"	345,0	1.1/16" -12 UN	91,5	32
PA 725 AJ H	25	16	1"	275,0	1.5/16" -12 UN	98,2	41
PA 725 AJ 32 H	25	16	1"	200,0	1.5/8" -12 UN	111,0	50
PA 532 AJ AH	31	20	1.1/4"	200,0	1.5/8" -12 UN	-	-