

# PA 500 AJ VA

Swage fitting, DKJ

**HANSA FLEX**

## Properties

**Application** Swage fitting for HD 500 hoses

**Connection 1** UN/UNF nut threads

**Sealing form 1** 74° inner cone


**Short code** DKJ

**Standard** ISO 8434-2

**Integration** with pull-out protection (interlock)

**Scope of supply** Swage nipple + swage ferrule

**Material** Stainless steel

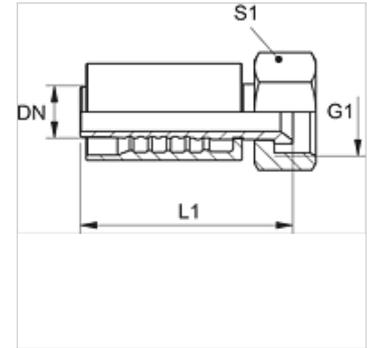

## Item

| Identification  | DN | Size | Inches | Operating pressure (bar) | G1             | S1 |
|-----------------|----|------|--------|--------------------------|----------------|----|
| PA 520 AJ VA    | 19 | 12   | 3/4"   | 350,0                    | 1.1/16" -12 UN | 32 |
| PA 520 AJ 25 VA | 19 | 12   | 3/4"   | 280,0                    | 1.5/16" -12 UN | 41 |
| PA 525 AJ VA    | 25 | 16   | 1"     | 280,0                    | 1.5/16" -12 UN | 41 |
| PA 525 AJ 32 VA | 25 | 16   | 1"     | 210,0                    | 1.5/8" -12 UN  | 50 |
| PA 532 AJ VA    | 31 | 20   | 1.1/4" | 210,0                    | 1.5/8" -12 UN  | 50 |
| PA 532 AJ 40 VA | 31 | 20   | 1.1/4" | 160,0                    | 1.7/8" -12 UN  | 60 |
| PA 540 AJ VA    | 38 | 24   | 1.1/2" | 160,0                    | 1.7/8" -12 UN  | 60 |
| PA 540 AJ 50 VA | 38 | 24   | 1.1/2" | 125,0                    | 2.1/2" -12 UN  | -  |
| PA 550 AJ VA    | 51 | 32   | 2"     | 125,0                    | 2.1/2" -12 UN  | 70 |