
# PA 500 AOB A

Swage fitting, DKOR

## Properties

| | |
|---|---|
| **Application** | Swage fitting for HD 500 hoses |
| **Connection 1** | BSP nut thread |
| **Sealing form 1** | 60° outer cone with O-ring |
| **Short code** | DKOR |
| **Standard** | ISO 8434-6<br>BS 5200 |
| **Integration** | with pull-out protection (interlock) |
| **Scope of supply** | Swage nipple + swage ferrule |
| **Material** | Steel |
| **Surface** | electro galvanised |



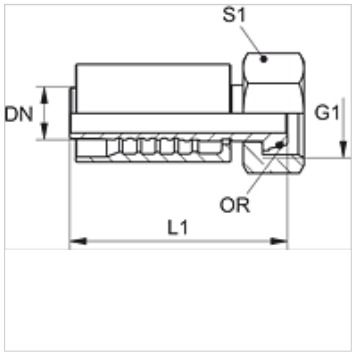


## Item

| Identification | DN | Size | Inches | G1 | L1 (mm) | S1 | OR |
|---|---|---|---|---|---|---|---|
| **PA 720 AOB** | 19 | 12 | 3/4" | G 3/4" -14 | 88,0 | 32 | 17.1 x 1.6 |
| **PA 725 AOB** | 25 | 16 | 1" | G 1" -11 | 102,5 | 41 | 22.1 x 1.6 |
| **PA 532 AOB A** | 31 | 20 | 1.1/4" | G 1.1/4" -11 | 116,0 | 50 | 29.1 x 1.6 |
| **PA 540 AOB A** | 38 | 24 | 1.1/2" | G 1.1/2" -11 | 133,5 | 55 | 35.1 x 1.6 |
| **PA 550 AOB A** | 51 | 32 | 2" | G 2" -11 | 147,0 | 70 | 48.1 x 1.6 |

## Product versions

| | |
|---|---|
| **PA 500 AOB VA** | Swage fitting, DKOR, Stainless steel |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*