


PA 500 AOB A H

Swage fitting, DKOR

HANSA**FLEX**

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	BSP nut thread
Sealing form 1	60° outer cone with O-ring
Short code	DKOR
Standard	ISO 8434-6 BS 5200
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Additional feature	for breaker operation
Material	Steel
Surface	electro galvanised

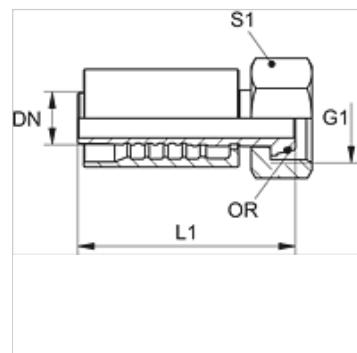

Description

Reinforced design for extreme loads, e.g. use in hammers.

Item

Identification	DN	Size	Inches	G1	L1 (mm)	S1	OR
PA 720 AOB H	19	12	3/4"	G 3/4" -14	96,5	32	17,1 x 1,6
PA 725 AOB H	25	16	1"	G 1" -11	103,0	41	22,1 x 1,6
PA 532 AOB A H	31	20	1.1/4"	G 1.1/4" -11	114,0	50	29,1 x 1,6