


PA 500 AOL 45 VA

Swage fitting, DKOL angle 45°

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 500 hoses |
| Connection 1 | metric nut thread |
| Sealing form 1 | 24° outer cone with O-ring |
| Short code | DKOL |
| Standard | ISO 8434-1 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Stainless steel |

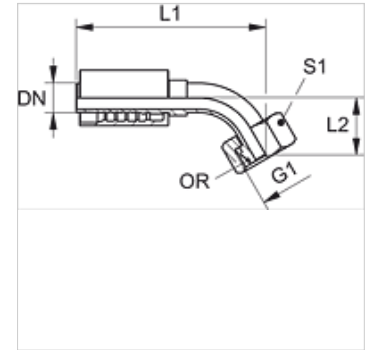

Ordering information

Seals of NBR
FPM (Viton) on request

| Item | | | | | | | | | |
|------------------|----|------|--------|----------|--------------------------|---------|----|------------|--|
| Identification | DN | Size | Inches | G1 | for external pipe Ø (mm) | L2 (mm) | S1 | OR | |
| PA 520 AOL 45 VA | 19 | 12 | 3/4" | M 30 x 2 | 22 | - | 36 | 20.0 x 2.0 | |
| PA 525 AOL 45 VA | 25 | 16 | 1" | M 36 x 2 | 28 | 50,0 | 41 | 25.0 x 2.0 | |
| PA 532 AOL 45 VA | 31 | 20 | 1.1/4" | M 45 x 2 | 35 | 50,0 | 50 | 30.0 x 2.5 | |
| PA 540 AOL 45 VA | 38 | 24 | 1.1/2" | M 52 x 2 | 42 | 61,0 | 60 | 38.0 x 2.5 | |

Product versions

PA 500 AOL 45 A