PA 500 AOS 45 A


Swage fitting, DKOS angle 45°

HANSA-FLEX

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOS
Standard	ISO 8434-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



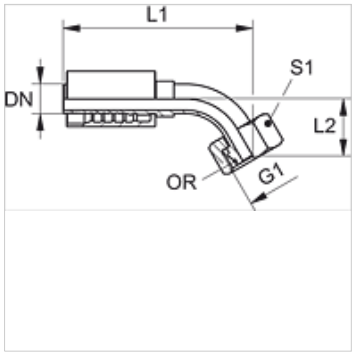

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L1 (mm)	L2 (mm)	S1	OR
PA 720 AOS 16 45	19	12	3/4"	M 30 x 2	20	133,0	27,0	36	16.0 x 2.5
PA 720 AOS 45	19	12	3/4"	M 36 x 2	25	136,0	30,0	46	20.0 x 2.5
PA 720 AOS 25 45	19	12	3/4"	M 42 x 2	30	142,0	35,0	50	27.0 x 2.5
PA 725 AOS 20 45	25	16	1"	M 36 x 2	25	156,5	34,5	41	22.0 x 2.5
PA 725 AOS 45	25	16	1"	M 42 x 2	30	164,0	34,5	50	25.0 x 2.5
PA 725 AOS 32 45	25	16	1"	M 52 x 2	38	170,0	41,0	60	33.0 x 2.5
PA 532 AOS 25 45 A	31	20	1"	M 42 x 2	30	175,0	39,5	50	27.0 x 2.5
PA 532 AOS 45 A	31	20	1.1/4"	M 52 x 2	38	192,5	41,0	60	33.0 x 2.5

Product versions

PA 500 AOS 45 VA	Swage fitting, DKOS angle 45°, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.