
PA 500 AOS 90 A

Swage fitting, DKOS angle 90°

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOS
Standard	ISO 8434-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



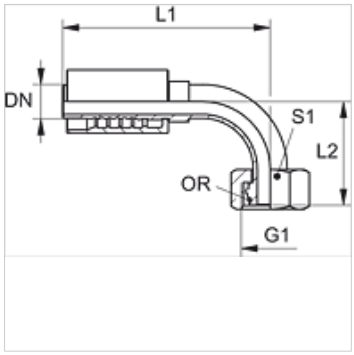

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L1 (mm)	L2 (mm)	S1	OR
PA 720 AOS 16 90	19	12	3/4"	M 30 x 2	20	125,5	57,5	36	17.5 x 2.5
PA 720 AOS 90	19	12	3/4"	M 36 x 2	25	125,5	62,0	46	22.0 x 2.5
PA 720 AOS 25 90	19	12	3/4"	M 42 x 2	30	129,0	71,5	50	27.0 x 2.5
PA 725 AOS 20 90	25	16	1"	M 36 x 2	25	144,0	71,0	46	22.0 x 2.5
PA 725 AOS 90	25	16	1"	M 42 x 2	30	157,5	72,5	50	27.0 x 2.5
PA 725 AOS 32 90	25	16	1"	M 52 x 2	38	154,5	84,5	60	33.0 x 2.5
PA 532 AOS 25 90 A	31	20	1.1/4"	M 42 x 2	30	162,0	82,0	50	27.0 x 2.5
PA 532 AOS 90 A	31	20	1.1/4"	M 52 x 2	38	182,0	91,0	60	33.0 x 2.5

Product versions

PA 500 AOS 90 VA	Swage fitting, DKOS angle 90°, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.