
PA 500 AOS A H

Swage fitting, DKOS

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOS
Standard	ISO 8434-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Additional feature	for breaker operation
Material	Steel
Surface	electro galvanised



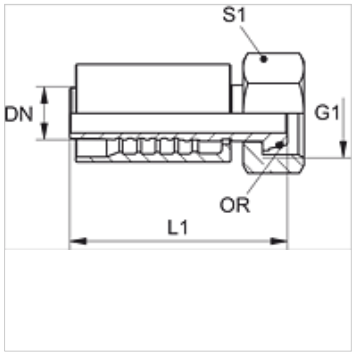

Description

Reinforced design for extreme loads, e.g. use in hammers.

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L1 (mm)	S1	OR
PA 720 AOS H	19	12	3/4"	M 36 x 2	25	104,0	46	20.0 x 2.5
PA 725 AOS H	25	16	1"	M 42 x 2	30	111,0	50	25.0 x 2.5
PA 532 AOS A H	31	20	1.1/4"	M 52 x 2	38	112,5	60	33.0 x 2.5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.