


PA 500 HJ A

Swage fitting, AGJ

HANSA FLEX

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	UN/UNF external threads
Sealing form 1	74° outer cone
Short code	AGJ
Standard	ISO 8434-2
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised

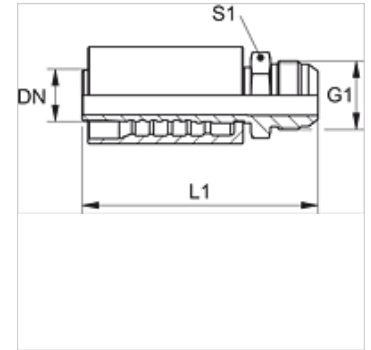

Item

Identification	DN	Size	Inches	G1	L1 (mm)	S1
PA 720 HJ	19	12	3/4"	1.1/16" -12 UN	102,5	27
PA 725 HJ	25	16	1"	1.5/16" -12 UN	117,0	36
PA 532 HJ A	31	20	1.1/4"	1.5/8" -12 UN	127,0	46
PA 540 HJ A	38	24	1.1/2"	1.7/8" -12 UN	145,5	50
PA 550 HJ A	51	32	2"	2.1/2" -12 UN	169,5	65

Product versions

PA 500 HJ VA	Swage fitting, AGJ, Stainless steel
--------------	-------------------------------------