

PA 500 HS A

Swage fitting, CES

HANSA FLEX

Properties

Application Swage fitting for HD 500 hoses

Connection 1 metric cylindrical outer thread

Sealing form 1 24° inner cone

Short code CES


Standard ISO 8434-1

Integration with pull-out protection (interlock)

Scope of supply Swage nipple + swage ferrule

Material Steel

Surface electro galvanised

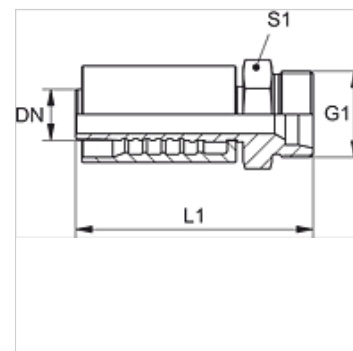

Item

| Identification | DN | Size | Inches | Series | G1 | for external pipe Ø (mm) | L1 (mm) | S1 |
|----------------|----|------|--------|--------|----------|-----------------------------|------------|----|
| PA 720 HS 16 | 19 | 12 | 3/4" | S | M 30 x 2 | 20 | 97,0 | 32 |
| PA 720 HS | 19 | 12 | 3/4" | S | M 36 x 2 | 25 | 99,0 | 41 |
| PA 725 HS | 25 | 16 | 1" | S | M 42 x 2 | 30 | 117,0 | 46 |
| PA 532 HS A | 31 | 20 | 1.1/4" | S | M 52 x 2 | 38 | 126,0 | 55 |

Product versions

PA 500 HS VA