


PA 500 SF A

Swage fitting, SFL

HANSA FLEX

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 500 hoses |
| Connection 1 | SAE flange connection 3000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFL |
| Standard | SAE J518 ISO 6162-1 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

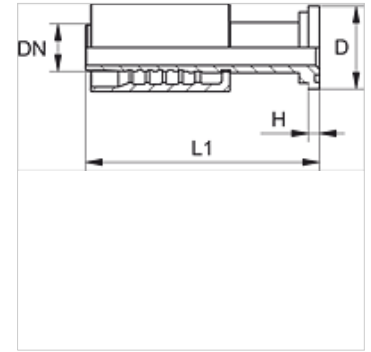

Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L1 (mm) |
|----------------|----|------|--------|-------------|-----------|-----------|------------|
| PA 720 SF | 19 | 12 | 3/4" | 3/4" | 38,1 | 6,8 | 116,5 |
| PA 720 SF 25 | 19 | 12 | 3/4" | 1" | 44,5 | 8,1 | 119,5 |
| PA 725 SF 20 | 25 | 16 | 1" | 3/4" | 38,1 | 6,8 | 132,0 |
| PA 725 SF | 25 | 16 | 1" | 1" | 44,5 | 8,1 | 135,5 |
| PA 725 SF 32 | 25 | 16 | 1" | 1.1/4" | 50,8 | 8,1 | 138,5 |
| PA 532 SF 25 A | 31 | 20 | 1.1/4" | 1" | 44,5 | 8,1 | 145,0 |
| PA 532 SF A | 31 | 20 | 1.1/4" | 1.1/4" | 50,8 | 8,1 | 148,5 |
| PA 532 SF 40 A | 31 | 20 | 1.1/4" | 1.1/2" | 60,3 | 8,1 | 151,5 |
| PA 540 SF 32 A | 38 | 24 | 1.1/2" | 1.1/4" | 50,8 | 8,1 | 158,0 |
| PA 540 SF A | 38 | 24 | 1.1/2" | 1.1/2" | 60,3 | 8,1 | 166,5 |
| PA 540 SF 50 A | 38 | 24 | 1.1/2" | 2" | 71,4 | 9,6 | 169,5 |
| PA 550 SF A | 51 | 32 | 2" | 2" | 71,4 | 9,6 | 183,5 |

Product versions

PA 500 SF VA Swage fitting, SFL, Stainless steel