
PA 500 SF A

Swage fitting, SFL

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	SAE flange connection 3000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFL
Standard	SAE J518 ISO 6162-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



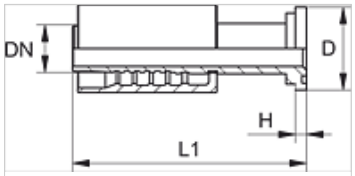

Item

Identification	DN	Size	Inches	Flange size	D (mm)	H (mm)	L1 (mm)
PA 720 SF	19	12	3/4"	3/4"	38,1	6,8	116,5
PA 720 SF 25	19	12	3/4"	1"	44,5	8,1	119,5
PA 725 SF 20	25	16	1"	3/4"	38,1	6,8	132,0
PA 725 SF	25	16	1"	1"	44,5	8,1	135,5
PA 725 SF 32	25	16	1"	1.1/4"	50,8	8,1	138,5
PA 532 SF 25 A	31	20	1.1/4"	1"	44,5	8,1	145,0
PA 532 SF A	31	20	1.1/4"	1.1/4"	50,8	8,1	148,5
PA 532 SF 40 A	31	20	1.1/4"	1.1/2"	60,3	8,1	151,5
PA 540 SF 32 A	38	24	1.1/2"	1.1/4"	50,8	8,1	158,0
PA 540 SF A	38	24	1.1/2"	1.1/2"	60,3	8,1	166,5
PA 540 SF 50 A	38	24	1.1/2"	2"	71,4	9,6	169,5
PA 550 SF A	51	32	2"	2"	71,4	9,6	183,5

Product versions

PA 500 SF VA	Swage fitting, SFL, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.