


# PA 500 SF6 90 4 K A

Swage fitting, SFS angle 90°

**HANSA****FLEX**

## Properties

|                 |                                      |
|-----------------|--------------------------------------|
| Application     | Swage fitting for HD 500 hoses       |
| Connection 1    | SAE flange connection 6000 PSI       |
| Sealing form 1  | flat seal with SF O-ring             |
| Short code      | SFS                                  |
| Standard        | SAE J518<br>ISO 6162-2               |
| Integration     | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule         |
| Material        | Steel                                |
| Surface         | electro galvanised                   |

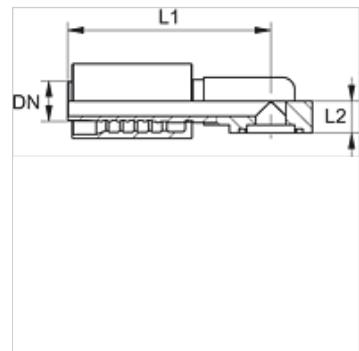

## Item

| Identification    | DN | Size | Inches | Flange size | H<br>(mm) | L1<br>(mm) | L2<br>(mm) |
|-------------------|----|------|--------|-------------|-----------|------------|------------|
| PA 720 SF6 90 4 K | 19 | 12   | 3/4"   | 3/4"        | 28,0      | 155,5      | 125,5      |
| PA 725 SF6 90 4 K | 25 | 16   | 1"     | 1"          | -         | -          | -          |