PA 500 SF6 A

Swage fitting, SFS

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	SAE flange connection 6000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFS
Standard	SAE J518 ISO 6162-2
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



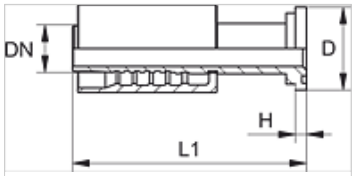

Item

Identification	DN	Size	Inches	Flange size	D (mm)	H (mm)	L1 (mm)
PA 720 SF6	19	12	3/4"	3/4"	41,3	8,8	124,5
PA 720 SF6 25	19	12	3/4"	1"	47,6	9,6	129,0
PA 725 SF6 20	25	16	1"	3/4"	41,3	8,8	134,0
PA 725 SF6	25	16	1"	1"	47,6	9,6	146,5
PA 725 SF6 32	25	16	1"	1.1/4"	54,0	10,4	151,0
PA 532 SF6 25 A	31	20	1.1/4"	1"	47,6	9,6	149,0
PA 532 SF6 A	31	20	1.1/4"	1.1/4"	54,0	10,4	162,5
PA 532 SF6 40 A	31	20	1.1/4"	1.1/2"	63,5	12,7	167,0
PA 540 SF6 32 A	38	24	1.1/2"	1.1/4"	54,0	10,4	162,0
PA 540 SF6 A	38	24	1.1/2"	1.1/2"	63,5	12,7	183,5
PA 540 SF6 50 A	38	24	1.1/2"	2"	79,4	12,7	188,0
PA 550 SF6 A	51	32	2"	2"	79,4	12,7	202,0

Product versions

PA 500 SF6 VA	Swage fitting, SFS, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.