


PA 600 SF 45 VA

Swage fitting, SFL angle 45°



Properties

| | |
|-----------------|--------------------------------------|
| Application | Swage fitting for HD 600 hoses |
| Connection 1 | SAE flange connection 3000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFL |
| Standard | SAE J518 ISO 6162-1 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Stainless steel |

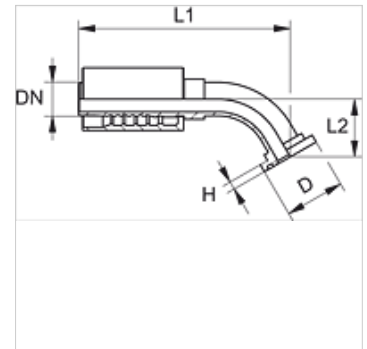

Ordering information

Seals of NBR
FPM (Viton) on request

| Item | | | | | | | |
|-----------------|----|------|--------|-------------|-----------|-----------|------------|
| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L2 (mm) |
| PA 650 SF 45 VA | 51 | 32 | 2" | 2" | 71,4 | 9,5 | 65,0 |

Product versions

PA 600 SF 45 Swage fitting, SFL angle 45°, Steel