


# PA 600 SF VA

Swage fitting, SFL

**HANSA FLEX**

## Properties

|                 |                                      |
|-----------------|--------------------------------------|
| Application     | Swage fitting for HD 600 hoses       |
| Connection 1    | SAE flange connection 3000 PSI       |
| Sealing form 1  | flat seal with SF O-ring             |
| Short code      | SFL                                  |
| Standard        | SAE J518<br>ISO 6162-1               |
| Integration     | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule         |
| Material        | Stainless steel                      |

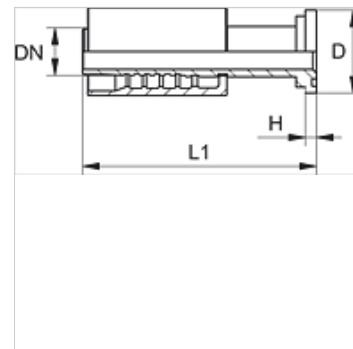

| Item           |    |      |        |             |           |           |
|----------------|----|------|--------|-------------|-----------|-----------|
| Identification | DN | Size | Inches | Flange size | D<br>(mm) | H<br>(mm) |
| PA 650 SF VA   | 51 | 32   | 2"     | 2"          | 71,4      | 9,5       |

## Product versions

|           |                           |
|-----------|---------------------------|
| PA 600 SF | Swage fitting, SFL, Steel |
|-----------|---------------------------|