


PA 600 SF6 45

Swage fitting, SFS angle 45°

HANSA FLEX

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 600 hoses |
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFS |
| Standard | SAE J518 ISO 6162-2 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

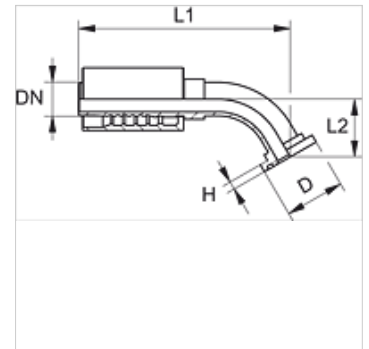

Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|----------------|----|------|--------|-------------|-----------|-----------|------------|------------|
| PA 650 SF6 45 | 51 | 32 | 2" | 2" | 79,4 | 12,6 | 275,0 | 64,5 |

Product versions

PA 600 SF6 45 VA Swage fitting, SFS angle 45°, Stainless steel