


PA 600 SF6 VA

Swage fitting, SFS

HANSA FLEX

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 600 hoses |
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFS |
| Standard | SAE J518 ISO 6162-2 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Stainless steel |

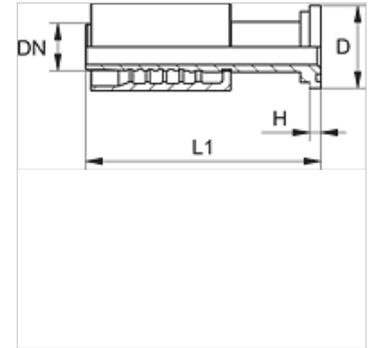

Ordering information

Seals of NBR
FPM (Viton) on request

| Item | | | | | | | |
|----------------|----|------|--------|-------------|-----------|-----------|--|
| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | |
| PA 650 SF6 VA | 51 | 32 | 2" | 2" | 79,4 | 12,6 | |

Product versions

PA 600 SF6 Swage fitting, SFS, Steel