

PA 700 AJF 45

Swage fitting, ORFS angle 45°

HANSA FLEX

Properties

Application Swage fitting for HD 700 hoses

Connection 1 UN/UNF nut threads

Sealing form 1 flat sealing

Short code ORFS


Standard ISO 8434-3

Integration with pull-out protection (interlock)

Scope of supply Swage nipple + swage ferrule

Material Steel

Surface electro galvanised

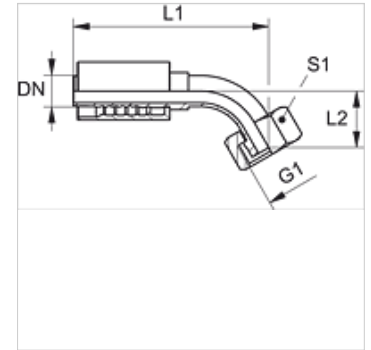

Item

| Identification | DN | Size | Inches | Operating pressure (bar) | G1 | L1 (mm) | L2 (mm) | S1 |
|----------------|----|------|--------|-----------------------------|-----------------|------------|------------|----|
| PA 720 AJF 45 | 19 | 12 | 3/4" | 413,0 | 1.3/16" -12 UN | 133,0 | 26,5 | 36 |
| PA 725 AJF 45 | 25 | 16 | 1" | 413,0 | 1.7/16" -12 UN | 160,5 | 31,0 | 41 |
| PA 732 AJF 45 | 31 | 20 | 1.1/4" | 275,0 | 1.11/16" -12 UN | 178,0 | 34,0 | 50 |
| PA 740 AJF 45 | 38 | 24 | 1.1/2" | 275,0 | 2" -12 UN | 209,0 | 32,0 | 60 |