# PA 700 AJF 45


Swage fitting, ORFS angle 45°

HANSA-FLEX

## Properties

| | |
|---|---|
| **Application** | Swage fitting for HD 700 hoses |
| **Connection 1** | UN/UNF nut threads |
| **Sealing form 1** | flat sealing |
| **Short code** | ORFS |
| **Standard** | ISO 8434-3 |
| **Integration** | with pull-out protection (interlock) |
| **Scope of supply** | Swage nipple + swage ferrule |
| **Material** | Steel |
| **Surface** | electro galvanised |



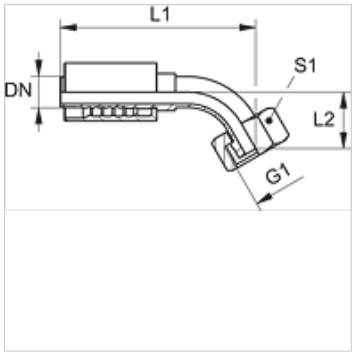


## Item

| Identification | DN | Size | Inches | Operating pressure (bar) | G1 | L1 (mm) | L2 (mm) | S1 |
|---|---|---|---|---|---|---|---|---|
| **PA 720 AJF 45** | 19 | 12 | 3/4" | 413,0 | 1.3/16" -12 UN | 133,0 | 26,5 | 36 |
| **PA 725 AJF 45** | 25 | 16 | 1" | 413,0 | 1.7/16" -12 UN | 160,5 | 31,0 | 41 |
| **PA 732 AJF 45** | 31 | 20 | 1.1/4" | 275,0 | 1.11/16" -12 UN | 178,0 | 34,0 | 50 |
| **PA 740 AJF 45** | 38 | 24 | 1.1/2" | 275,0 | 2" -12 UN | 209,0 | 32,0 | 60 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*