


PA 700 AOB

Swage fitting, DKOR



Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 700 hoses |
| Connection 1 | BSP nut thread |
| Sealing form 1 | 60° outer cone with O-ring |
| Short code | DKOR |
| Standard | ISO 8434-6 BS 5200 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

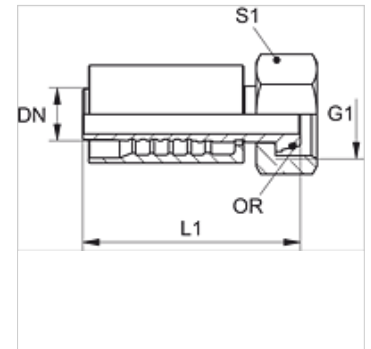

Item

| Identification | DN | Size | Inches | Operating pressure (bar) | G1 | L1 (mm) | S1 | OR |
|----------------|----|------|--------|-----------------------------|--------------|------------|----|------------|
| PA 720 AOB | 19 | 12 | 3/4" | 420,0 | G 3/4" -14 | 88,0 | 32 | 17.1 x 1.6 |
| PA 725 AOB | 25 | 16 | 1" | 420,0 | G 1" -11 | 102,5 | 41 | 22.1 x 1.6 |
| PA 732 AOB | 31 | 20 | 1.1/4" | 420,0 | G 1.1/4" -11 | 116,0 | 50 | 29.1 x 1.6 |
| PA 740 AOB | 38 | 24 | 1.1/2" | 420,0 | G 1.1/2" -11 | 133,5 | 55 | 35.1 x 1.6 |
| PA 740 AOB 50 | 38 | 24 | 1.1/2" | 345,0 | G 2" -11 | 143,2 | 70 | 48.1 x 1.6 |

Product versions

| | |
|---------------|--------------------------------------|
| PA 700 AOB VA | Swage fitting, DKOR, Stainless steel |
|---------------|--------------------------------------|