


PA 700 AOB H

Swage fitting, DKOR

HANSA FLEX

Properties

| | |
|---------------------------|--------------------------------------|
| Application | Swage fitting for HD 700 hoses |
| Connection 1 | BSP nut thread |
| Sealing form 1 | 60° outer cone with O-ring |
| Short code | DKOR |
| Standard | ISO 8434-6 BS 5200 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Additional feature | for breaker operation |
| Material | Steel |
| Surface | electro galvanised |

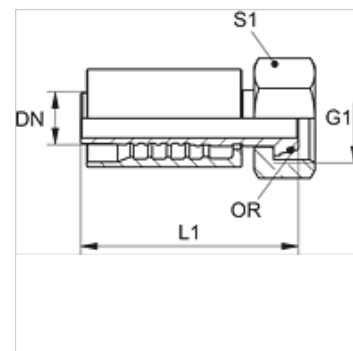

Description

Reinforced design for extreme loads, e.g. use in hammers.

| Item | | | | | | | | | |
|----------------|----|------|--------|-----------------------------|------------|------------|----|------------|--|
| Identification | DN | Size | Inches | Operating pressure (bar) | G1 | L1 (mm) | S1 | OR | |
| PA 720 AOB H | 19 | 12 | 3/4" | 420,0 | G 3/4" -14 | 96,5 | 32 | 17.1 x 1.6 | |
| PA 725 AOB H | 25 | 16 | 1" | 420,0 | G 1" -11 | 103,0 | 41 | 22.1 x 1.6 | |