

# PA 700 AOS H

Swage fitting, DKOS

**HANSA FLEX**

## Properties

**Application** Swage fitting for HD 700 hoses

**Connection 1** metric nut thread

**Sealing form 1** 24° outer cone with O-ring

**Short code** DKOS

**Standard** ISO 8434-1


**Integration** with pull-out protection (interlock)

**Scope of supply** Swage nipple + swage ferrule

**Additional feature** for breaker operation

**Material** Steel

**Surface** electro galvanised

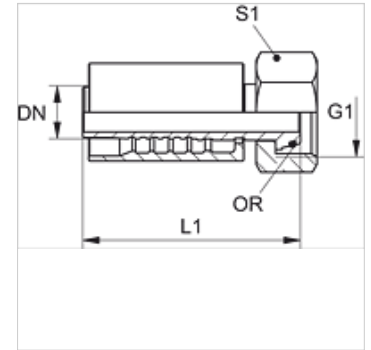

## Description

Reinforced design for extreme loads, e.g. use in hammers.

## Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L1 (mm)	S1	OR
PA 720 AOS H	19	12	3/4"	M 36 x 2	25	104,0	46	20.0 x 2.5
PA 725 AOS H	25	16	1"	M 42 x 2	30	111,0	50	25.0 x 2.5
PA 732 AOS SH	31	20	1.1/4"	M 52 x 2	38	114,0	60	33.0 x 2.5