

PA 700 AOS VA

Swage fitting, DKOS

HANSA FLEX

Properties

Application Swage fitting for HD 700 hoses

Connection 1 metric nut thread

Sealing form 1 24° outer cone with O-ring


Short code DKOS

Standard ISO 8434-1

Integration with pull-out protection (interlock)

Scope of supply Swage nipple + swage ferrule

Material Stainless steel

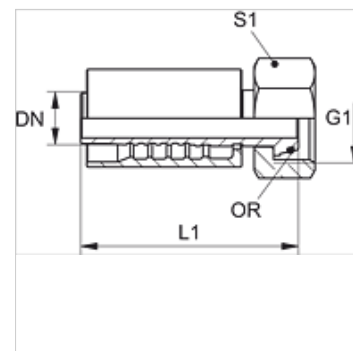

Ordering information

Seals of NBR

FPM (Viton) on request

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	S1	OR
PA 720 AOS 16 VA	19	12	3/4"	M 30 x 2	20	36	16.0 x 2.5
PA 720 AOS VA	19	12	3/4"	M 36 x 2	25	46	20.0 x 2.5
PA 725 AOS 20 VA	25	16	1"	M 36 x 2	25	46	20.0 x 2.5
PA 725 AOS VA	25	16	1"	M 42 x 2	30	50	25.0 x 2.5
PA 732 AOS VA	31	20	1.1/4"	M 52 x 2	38	60	33.0 x 2.5
PA 740 AOS VA	38	24	1.1/2"	M 68 x 2	50	80	38.0 x 2.0

Product versions

PA 700 AOS Swage fitting, DKOS, Steel