
PA 700 SF
Swage fitting, SFL

Properties

Application	Swage fitting for HD 700 hoses
Connection 1	SAE flange connection 3000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFL
Standard	SAE J518 ISO 6162-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



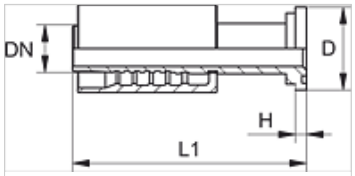

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)
PA 713 SF	12	8	1/2"	1/2"	350,0	30,2	6,7	90,4
PA 713 SF 20	12	8	1/2"	3/4"	350,0	38,1	6,7	91,6
PA 716 SF 20	16	10	3/8"	3/4"	350,0	38,1	6,7	102,6
PA 720 SF	19	12	3/4"	3/4"	350,0	38,1	6,8	116,5
PA 720 SF 25	19	12	3/4"	1"	320,0	44,5	8,1	119,5
PA 725 SF 20	25	16	1"	3/4"	320,0	38,1	6,8	132,0
PA 725 SF	25	16	1"	1"	320,0	44,5	8,1	135,5
PA 725 SF 32	25	16	1"	1.1/4"	280,0	50,8	8,1	138,5
PA 732 SF 25 S	31	20	1.1/4"	1"	280,0	44,5	8,0	145,0
PA 732 SF S	31	20	1.1/4"	1.1/4"	280,0	50,8	8,0	144,5
PA 732 SF 40 S	31	20	1.1/4"	1.1/2"	210,0	60,3	8,0	129,0
PA 740 SF 32	38	24	1.1/2"	1.1/4"	210,0	50,8	8,1	158,0
PA 740 SF	38	24	1.1/2"	1.1/2"	210,0	60,3	8,1	166,5
PA 740 SF 50	38	24	1.1/2"	2"	210,0	71,4	9,6	169,5

Product versions

PA 700 SF VA	Swage fitting, SFL, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.