


# PA 700 SF

Swage fitting, SFL

## Properties

<b>Application</b>	Swage fitting for HD 700 hoses
<b>Connection 1</b>	SAE flange connection 3000 PSI
<b>Sealing form 1</b>	flat seal with SF O-ring
<b>Short code</b>	SFL
<b>Standard</b>	SAE J518 ISO 6162-1
<b>Integration</b>	with pull-out protection (interlock)
<b>Scope of supply</b>	Swage nipple + swage ferrule
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

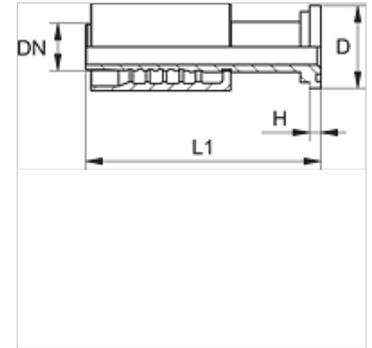

Item									
Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)	
PA 713 SF	12	8	1/2"	1/2"	350,0	30,2	6,7	90,4	
PA 713 SF 20	12	8	1/2"	3/4"	350,0	38,1	6,7	91,6	
PA 716 SF 20	16	10	3/8"	3/4"	350,0	38,1	6,7	102,6	
PA 720 SF	19	12	3/4"	3/4"	350,0	38,1	6,8	116,5	
PA 720 SF 25	19	12	3/4"	1"	320,0	44,5	8,1	119,5	
PA 725 SF 20	25	16	1"	3/4"	320,0	38,1	6,8	132,0	
PA 725 SF	25	16	1"	1"	320,0	44,5	8,1	135,5	
PA 725 SF 32	25	16	1"	1.1/4"	280,0	50,8	8,1	138,5	
PA 732 SF 25 S	31	20	1.1/4"	1"	280,0	44,5	8,0	145,0	
PA 732 SF S	31	20	1.1/4"	1.1/4"	280,0	50,8	8,0	144,5	
PA 732 SF 40 S	31	20	1.1/4"	1.1/2"	210,0	60,3	8,0	129,0	
PA 740 SF 32	38	24	1.1/2"	1.1/4"	210,0	50,8	8,1	158,0	
PA 740 SF	38	24	1.1/2"	1.1/2"	210,0	60,3	8,1	166,5	
PA 740 SF 50	38	24	1.1/2"	2"	210,0	71,4	9,6	169,5	

## Product versions

PA 700 SF VA	Swage fitting, SFL, Stainless steel
--------------	-------------------------------------