# PA 700 SF 45

Swage fitting, SFL angle 45°

HANSA-FLEX

## Properties

| | |
|---|---|
| **Application** | Swage fitting for HD 700 hoses |
| **Connection 1** | SAE flange connection 3000 PSI |
| **Sealing form 1** | flat seal with SF O-ring |
| **Short code** | SFL |
| **Standard** | SAE J518<br>ISO 6162-1 |
| **Integration** | with pull-out protection (interlock) |
| **Scope of supply** | Swage nipple + swage ferrule |
| **Material** | Steel |
| **Surface** | electro galvanised |

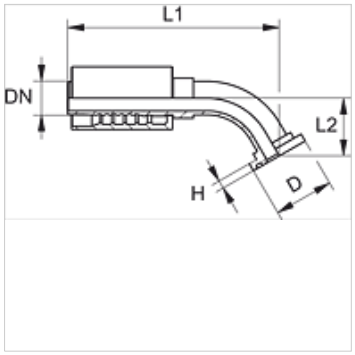


## Item

| Identification | DN | Size | Inches | Flange size | Operating pressure (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|---|---|---|---|---|---|---|---|---|---|
| **PA 713 SF 45** | 12 | 8 | 1/2" | 1/2" | 350,0 | 30,2 | 6,7 | 94,5 | 22,5 |
| **PA 713 SF 20 45** | 12 | 8 | 1/2" | 3/4" | 350,0 | 38,1 | 6,7 | 126,0 | 26,5 |
| **PA 720 SF 45** | 19 | 12 | 3/4" | 3/4" | 350,0 | 38,1 | 6,8 | 132,5 | 27,5 |
| **PA 720 SF 25 45** | 19 | 12 | 3/4" | 1" | 320,0 | 44,5 | 8,1 | 134,5 | 29,5 |
| **PA 725 SF 20 45** | 25 | 16 | 1" | 3/4" | 320,0 | 38,1 | 6,8 | 153,0 | 30,0 |
| **PA 725 SF 45** | 25 | 16 | 1" | 1" | 320,0 | 44,5 | 8,1 | 159,0 | 28,5 |
| **PA 725 SF 32 45** | 25 | 16 | 1" | 1.1/4" | 280,0 | 50,8 | 8,1 | 161,0 | 30,5 |
| **PA 732 SF 25 45 S** | 31 | 20 | 1.1/4" | 1" | 280,0 | 44,5 | 8,0 | 170,5 | 35,0 |
| **PA 732 SF 45 S** | 31 | 20 | 1.1/4" | 1.1/4" | 280,0 | 50,8 | 8,0 | 181,5 | 41,5 |
| **PA 732 SF 40 45 S** | 31 | 20 | 1.1/4" | 1.1/2" | 210,0 | 60,3 | 8,0 | 188,0 | 43,5 |
| **PA 740 SF 32 45** | 38 | 24 | 1.1/2" | 1.1/4" | 210,0 | 50,8 | 8,1 | 199,5 | 42,0 |
| **PA 740 SF 45** | 38 | 24 | 1.1/2" | 1.1/2" | 210,0 | 60,3 | 8,1 | 212,5 | 41,5 |
| **PA 740 SF 50 45** | 38 | 24 | 1.1/2" | 2" | 210,0 | 71,4 | 9,6 | 233,5 | 58,5 |

## Product versions

| | |
|---|---|
| **PA 700 SF 45 VA** | Swage fitting, SFL angle 45°, Stainless steel |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*