


# PA 700 SF 90

Swage fitting, SFL angle 90°

**HANSA FLEX**

## Properties

<b>Application</b>	Swage fitting for HD 700 hoses
<b>Connection 1</b>	SAE flange connection 3000 PSI
<b>Sealing form 1</b>	flat seal with SF O-ring
<b>Short code</b>	SFL
<b>Standard</b>	SAE J518 ISO 6162-1
<b>Integration</b>	with pull-out protection (interlock)
<b>Scope of supply</b>	Swage nipple + swage ferrule
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

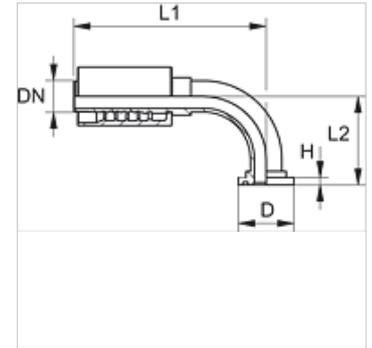

## Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PA 713 SF 90	12	8	1/2"	1/2"	350,0	30,2	6,7	85,9	45,0
PA 713 SF 20 90	12	8	1/2"	3/4"	350,0	38,1	6,7	96,0	51,0
PA 720 SF 90	19	12	3/4"	3/4"	350,0	38,1	6,8	127,5	58,0
PA 720 SF 90 L 95	19	12	3/4"	3/4"	350,0	38,1	6,8	127,5	95,0
PA 720 SF 90 L 100	19	12	3/4"	3/4"	350,0	38,1	6,8	127,5	100,0
PA 720 SF 90 L 120	19	12	3/4"	3/4"	350,0	38,1	6,8	127,5	120,0
PA 720 SF 25 90	19	12	3/4"	1"	-	44,5	8,1	127,5	61,0
PA 720 SF 25 90 L 82	19	12	3/4"	1"	320,0	44,5	8,1	127,5	82,0
PA 725 SF 20 90	25	16	1"	3/4"	320,0	38,1	6,8	144,0	64,5
PA 725 SF 90	25	16	1"	1"	320,0	44,5	8,1	158,0	67,0
PA 725 SF 32 90	25	16	1"	1.1/4"	280,0	50,8	8,1	158,0	69,5
PA 732 SF 25 90 S	31	20	1.1/4"	1"	280,0	44,5	8,0	162,0	76,0
PA 732 SF 90 S	31	20	1.1/4"	1.1/4"	280,0	50,8	8,0	173,0	88,0
PA 732 SF 40 90 S	31	20	1.1/4"	1.1/2"	210,0	60,3	8,0	177,0	95,0
PA 740 SF 32 90	38	24	1.1/2"	1.1/4"	210,0	50,8	8,1	190,5	93,0
PA 740 SF 90	38	24	1.1/2"	1.1/2"	210,0	60,3	8,1	208,5	99,0
PA 740 SF 50 90	38	24	1.1/2"	2"	210,0	71,4	9,6	218,0	104,0

## Product versions

PA 700 SF 90 VA Swage fitting, SFL angle 90°, Stainless steel