


# PA 700 SF VA

Swage fitting, SFL

**HANSA FLEX**

## Properties

<b>Application</b>	Swage fitting for HD 700 hoses
<b>Connection 1</b>	SAE flange connection 3000 PSI
<b>Sealing form 1</b>	flat seal with SF O-ring
<b>Short code</b>	SFL
<b>Standard</b>	SAE J518 ISO 6162-1
<b>Integration</b>	with pull-out protection (interlock)
<b>Scope of supply</b>	Swage nipple + swage ferrule
<b>Material</b>	Stainless steel

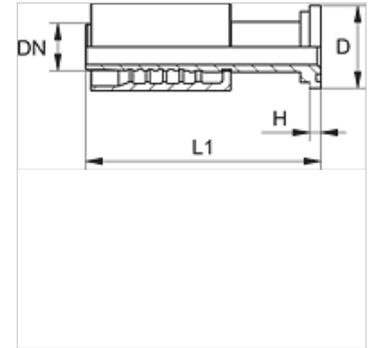

## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)
PA 732 SF VA	31	20	1.1/4"	1.1/4"	280,0	50,8	8,0
PA 732 SF 40 VA	31	20	1.1/4"	1.1/2"	210,0	60,3	8,0
PA 740 SF VA	38	24	1.1/2"	1.1/2"	210,0	60,3	8,0
PA 740 SF 50 VA	38	24	1.1/2"	2"	210,0	71,4	9,5

## Product versions

PA 700 SF Swage fitting, SFL, Steel