
PA 700 SF6
Swage fitting, SFS

HANSA-FLEX

Properties

Application	Swage fitting for HD 700 hoses
Connection 1	SAE flange connection 6000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFS
Standard	SAE J518 ISO 6162-2
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



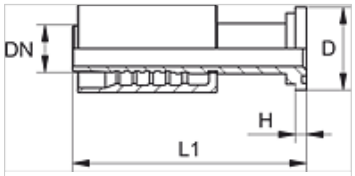

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)
PA 713 SF6	12	8	1/2"	1/2"	420,0	31,8	7,7	90,4
PA 713 SF6 20	12	8	1/2"	3/4"	420,0	41,3	8,8	93,9
PA 716 SF6 13	16	10	5/8"	1/2"	420,0	31,8	7,7	108,0
PA 716 SF6 20	16	10	5/8"	3/4"	420,0	41,3	8,8	102,0
PA 716 SF6 25	16	10	5/8"	1"	420,0	47,6	9,5	103,0
PA 720 SF6	19	12	3/4"	3/4"	420,0	41,3	8,8	124,5
PA 720 SF6 25	19	12	3/4"	1"	420,0	47,6	9,6	129,0
PA 725 SF6 20	25	16	1"	3/4"	420,0	41,3	8,8	134,0
PA 725 SF6	25	16	1"	1"	420,0	47,6	9,6	146,5
PA 725 SF6 32	25	16	1"	1.1/4"	420,0	54,0	10,4	151,0
PA 732 SF6 S	31	20	1.1/4"	1.1/4"	420,0	54,0	10,3	147,6
PA 732 SF6 25 S	31	20	1.1/4"	1"	420,0	47,6	9,5	149,0
PA 732 SF6 40 S	31	20	1.1/4"	1.1/2"	420,0	63,5	12,6	162,0
PA 740 SF6 32	38	24	1.1/2"	1.1/4"	420,0	54,0	10,4	162,0
PA 740 SF6	38	24	1.1/2"	1.1/2"	420,0	63,5	12,7	183,5
PA 740 SF6 50	38	24	1.1/2"	2"	420,0	79,4	12,7	188,0
PA 750 SF6	51	32	2"	2"	420,0	79,4	12,6	233,0

Product versions

PA 700 SF6 VA	Swage fitting, SFS, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.