


# PA 700 SF9 45

Swage fitting, SFS-CAT angle 45°

## Properties

|                        |                                      |
|------------------------|--------------------------------------|
| <b>Application</b>     | Swage fitting for HD 700 hoses       |
| <b>Connection 1</b>    | SAE flange connection 6000 PSI       |
| <b>Sealing form 1</b>  | flat seal with SF O-ring             |
| <b>Short code</b>      | SFS-CAT                              |
| <b>suitable for</b>    | Caterpillar                          |
| <b>Integration</b>     | with pull-out protection (interlock) |
| <b>Scope of supply</b> | Swage nipple + swage ferrule         |
| <b>Material</b>        | Steel                                |
| <b>Surface</b>         | electro galvanised                   |

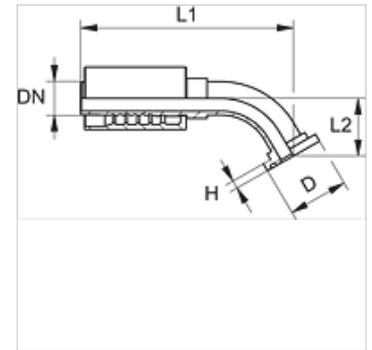

## Item

| Identification     | DN | Size | Inches | Flange size | Operating pressure (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|--------------------|----|------|--------|-------------|--------------------------|--------|--------|---------|---------|
| PA 720 SF9 45      | 19 | 12   | 3/4"   | 3/4"        | 420,0                    | 41,3   | 14,2   | 139,0   | 34,0    |
| PA 720 SF9 25 45   | 19 | 12   | 3/4"   | 1"          | 420,0                    | 47,6   | 14,2   | 143,0   | 37,5    |
| PA 725 SF9 20 45   | 25 | 16   | 1"     | 3/4"        | 420,0                    | 41,3   | 14,2   | 157,0   | 35,0    |
| PA 725 SF9 45      | 25 | 16   | 1"     | 1"          | 420,0                    | 47,6   | 14,2   | 167,0   | 36,5    |
| PA 725 SF9 32 45   | 25 | 16   | 1"     | 1.1/4"      | 420,0                    | 54,0   | 14,2   | 172,0   | 41,5    |
| PA 732 SF9 25 45 S | 31 | 20   | 1.1/4" | 1"          | 420,0                    | 47,6   | 14,0   | 174,0   | 39,5    |
| PA 732 SF9 45 S    | 31 | 20   | 1.1/4" | 1.1/4"      | 420,0                    | 54,0   | 14,0   | 187,0   | 44,0    |
| PA 732 SF9 40 45 S | 31 | 20   | 1.1/4" | 1.1/2"      | 420,0                    | 63,5   | 14,0   | 195,5   | 52,0    |
| PA 740 SF9 32 45   | 38 | 24   | 1.1/2" | 1.1/4"      | 420,0                    | 54,0   | 14,0   | 205,5   | 47,0    |
| PA 740 SF9 45      | 38 | 24   | 1.1/2" | 1.1/2"      | 420,0                    | 63,5   | 14,2   | 224,0   | 51,0    |