PA 700 SF9 90


Swage fitting, SFS-CAT angle 90°

HANSA-FLEX

Properties

Application	Swage fitting for HD 700 hoses
Connection 1	SAE flange connection 6000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFS-CAT
suitable for	Caterpillar
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



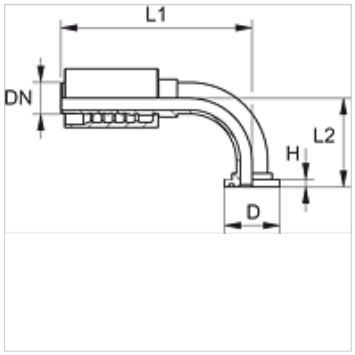

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PA 720 SF9 90	19	12	3/4"	3/4"	420,0	41,3	14,2	127,5	67,5
PA 720 SF9 25 90	19	12	3/4"	1"	420,0	47,6	14,2	127,5	72,5
PA 725 SF9 20 90	25	16	1"	3/4"	420,0	41,3	14,2	144,0	83,5
PA 725 SF9 90	25	16	1"	1"	420,0	47,6	14,2	158,0	78,5
PA 725 SF9 32 90	25	16	1"	1.1/4"	420,0	54,0	14,2	158,0	85,0
PA 732 SF9 25 90 S	31	20	1.1/4"	1"	420,0	47,6	14,4	170,5	95,5
PA 732 SF9 90 S	31	20	1.1/4"	1.1/4"	420,0	54,0	14,4	169,5	96,0
PA 732 SF9 40 90 S	31	20	1.1/4"	1.1/2"	420,0	63,5	14,4	171,0	96,0
PA 740 SF9 32 90	38	24	1.1/2"	1.1/4"	420,0	54,0	14,0	192,0	100,0
PA 740 SF9 90	38	24	1.1/2"	1.1/2"	420,0	63,5	14,1	214,0	111,5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.