


PAY 300 SF 45

Swage fitting, SFL angle 45°

HANSA**FLEX**

Properties

| | |
|-----------------|--------------------------------|
| Connection 1 | SAE flange connection 3000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFL |
| Standard | SAE J518 ISO 6162-1 |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

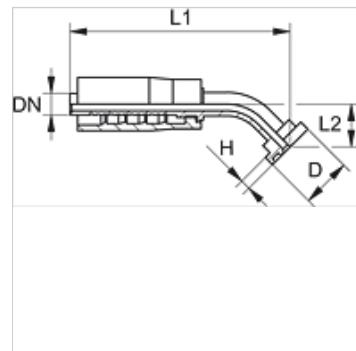

Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|-------------------------|----|------|--------|-------------|-----------|-----------|------------|------------|
| PAY 316 SF 20 45 | 16 | 10 | 5/8" | 3/4" | 38,1 | 6,7 | 113,5 | 24,0 |
| PAY 325 SF 45 | 25 | 16 | 1" | 1" | 44,4 | 8,0 | 125,0 | 32,0 |
| PAY 332 SF 45 | 31 | 20 | 1.1/4" | 1.1/4" | 50,8 | 8,0 | 174,0 | 37,0 |