


PAY 300 SF6 90

Swage fitting, SFS angle 90°



Properties

| | |
|------------------------|--------------------------------|
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFS |
| Standard | SAE J518 ISO 6162-2 |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

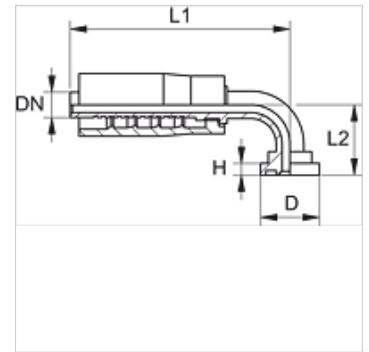

Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|-------------------|----|------|--------|-------------|-----------|-----------|------------|------------|
| PAY 313 SF6 90 | 12 | 8 | 1/2" | 1/2" | 31,8 | 7,7 | 87,0 | 41,0 |
| PAY 316 SF6 20 90 | 16 | 10 | 5/8" | 3/4" | 41,3 | 8,8 | 104,5 | 54,0 |
| PAY 320 SF6 90 | 19 | 12 | 3/4" | 3/4" | 41,3 | 8,8 | 116,5 | 63,0 |
| PAY 325 SF6 90 | 25 | 16 | 1" | 1" | 47,6 | 9,5 | 116,0 | 75,0 |
| PAY 332 SF6 90 | 31 | 20 | 1.1/4" | 1.1/4" | 54,0 | 10,3 | 165,0 | 91,0 |